



HIGH EFFICIENCY
DUCTLESS
ULTRA COMFORT




100% WIFI





PREMIUM SERIES

UNITED APPLIANCES
HEATING & COOLING AIR CONDITIONING

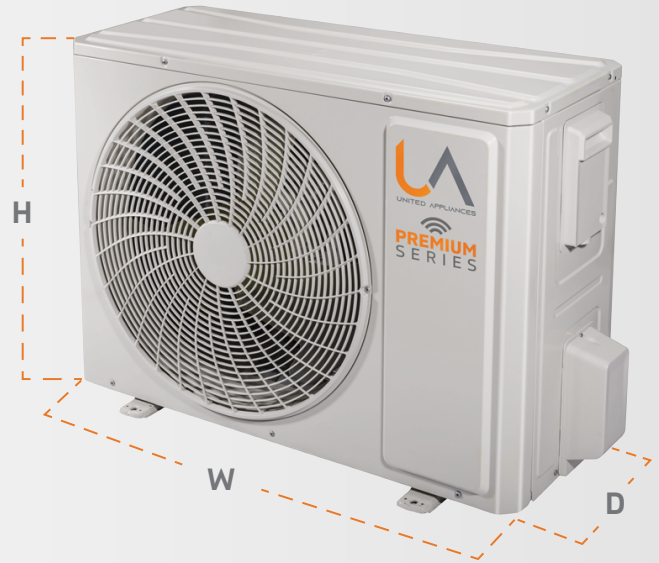

DEHUMIDIFICATION



I FEEL



SELF DIAGNOSIS



SLEEP FUNCTION



BLUE FIN



TECHNICAL SPECIFICATION | PREMIUM SERIES

DESCRIPTION	UNIT	12K BTU/h 115V	12K BTU/h 220V	18K BTU/h 220V	24K BTU/h 220V	30K BTU/h 220V	36K BTU/h 220V
		UAWH12-AD3D1	UAWH12-DD3D1	UAWH18-DD3D1	UAWH24-DD3D1	UAWH30-DD3D1	UAWH36-DD3D1
RATED VOLTAGE	V~	115	208/230	208/230	208/230	208/230	208/230
SEER	SEER2	16.5	16.5	16	18	20	20
COOLING CAPACITY	BTU/h	13,307	13,307	19,278	25,249	35,500	37,200
HEATING CAPACITY	BTU/h	15,012.8	13,648	22,519	26,614	36,850	38,500
COOLING POWER INPUT	W	1,345	1,345	1,820	1,896	2,667	3,200
HEATING POWER INPUT	W	1,082	1,082	1,866	2,051	2,588	3,200
COOLING CURRENT	A	14.6	6.0	8.1	8.5	12	14
HEATING CURRENT	A	11.8	4.8	8.2	9.5	11.5	14
REFRIGERANT	R	R410A	R410A	R410A	R410A	R410A	R410A
REFRIGERANT CHARGE	oz	24.696	27.518	42.4	52.9	74.1	84.7
IDU SOUND POWER LEVEL	dB	49/39/52	55/47/40	57/51/44	61/52/47	66/55/47	66/55/47
ODU SOUND POWER LEVEL	dB	62	62	67	67	72	72
DIMENSION IDU (WxHxD)	mm	845×289×209	845×289×209	970×300×225	1078×325×246	1350×326×253	1350×326×253
DIMENSION ODU (WxHxD)	mm	732×555×330	732×555×330	802×555×350	958×660×402	1000×746×427	1000×746×427
IDU NET WEIGHT	lb	22	22	29.8	34.2	44.1	44.1
ODU NET WEIGHT	lb	58.433	56.228	69.5	97	113.6	127.9